



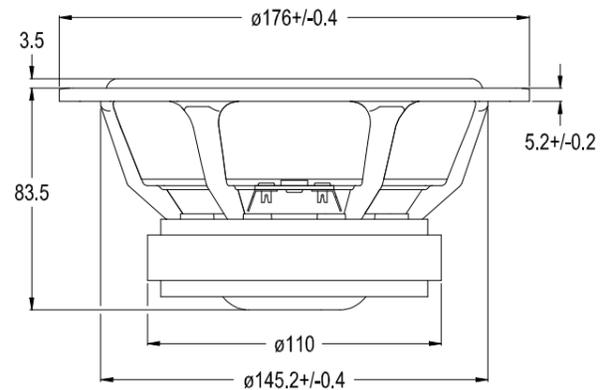

WOOFER W18EX001 E 0017

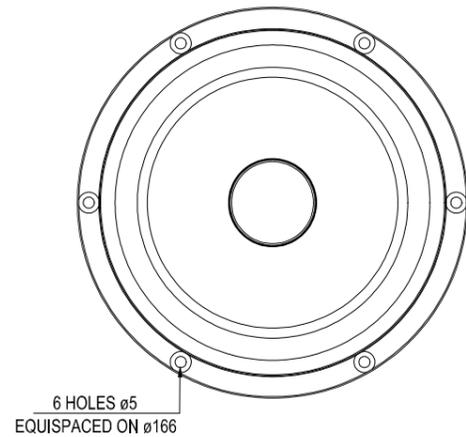

W18EX001 E0017

The W18EX001 is a 6,5" cone driver developed for use as a high fidelity Woofer or Woofer/Midrange unit. The extremely stiff, yet light cone and the acoustically transparent basket give tremendous bass precision and midrange detail.

SPECIAL FEATURES:

Precision cast and surface treated magnesium cone coupled to a natural rubber surround showing no sign of midrange (edge) resonances.

Large magnet system for improved sensitivity and transient response. The bumped back plate makes room for extreme coil excursions.

Heavy copper rings mounted above and below the T-shaped pole piece, to reduce non linear and modulation distortion and increase overload margin.

Copper plating of the top and bottom plates and a solid copper phase plug, which enhance the performance of the copper rings and improve heat conduction away from the pole piece.


Gold plated terminals mounted on a glass fibre reinforced plate to reduce contact resistance and improve reliability.

Extremely stiff and stable injection moulded metal basket to keep the critical components in perfect alignment. Large windows in the basket both above and below the spider to reduce sound reflexion, air flow noise and cavity resonance to a minimum.

| | | | |
|-------------------------------------|-------------|------------------------------------|-------------|
| NOMINAL IMPEDANCE | 8 Ohms | VOICE COIL RESISTANCE | 6,1 Ohms |
| RECOMMENDED FREQUENCY RANGE | 40-2500 Hz | VOICE COIL INDUCTANCE (EQUIVALENT) | 0,4 mH |
| SHORT TERM MAXIMUM POWER * | 250 W | FORCE FACTOR | 8,6 N/A |
| LONG TERM MAXIMUM POWER* | 100 W | FREE AIR RESONANCE | 31 Hz |
| CHARACTERISTIC SENSITIVITY (1W, 1m) | 88,0 dB SPL | MOVING MASS | 15,5 g |
| OPERATING POWER (96 dB SPL ,1 m) | 6,3 W | AIR LOAD MASS IN IEC BAFFLE | 1,0 g |
| VOICE COIL DIAMETER | 39 mm | SUSPENSION COMPLIANCE | 1,6 mm/N |
| VOICE COIL HEIGHT | 16 mm | SUSPENSION MECHANICAL RESISTANCE | 1,7 Ns/m |
| AIR GAP HEIGHT | 6,0 mm | EFFECTIVE PISTON AREA | 126 sq.cm |
| LINEAR COIL TRAVEL (p-p) | 10,0 mm | VAS | 37,0 Litres |
| MAXIMUM COIL TRAVEL (p-p) | 19 mm | QMS | 2,00 |
| MAGNETIC GAP FLUX DENSITY | 1,0 T | QES | 0,27 |
| MAGNET WEIGHT | 0,64 Kg | QTS | 0,24 |
| TOTAL WEIGHT | 2,15 Kg | | |

* IEC 268-5

Response curve recorded in anechoic chamber (Free-field, 4 pi radiation) with 0.5m microphone distance.
The loudspeaker is mounted in a closed box of 12 l net. volume

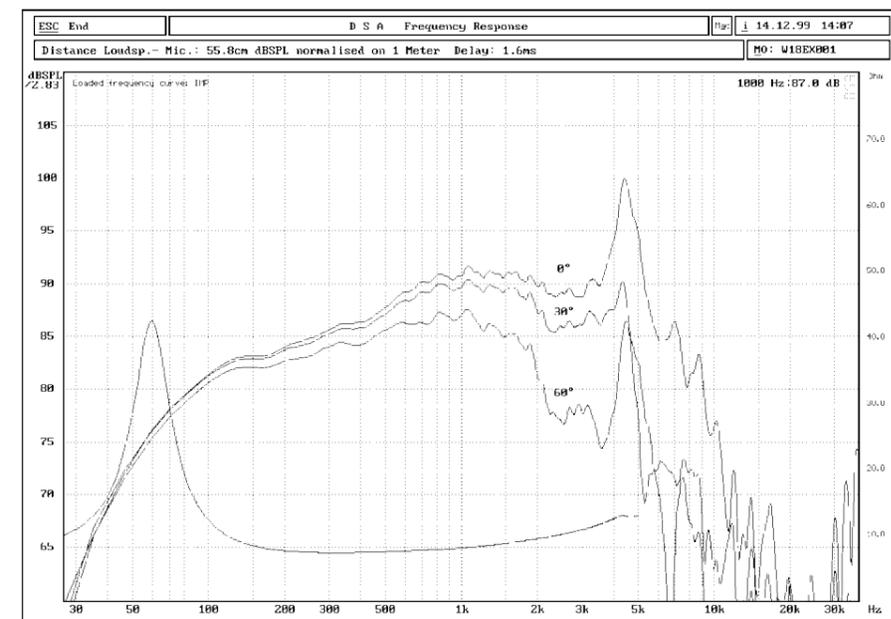

Distortion on axis in % between 25 and 2000 Hz at operating power.

