



SPL Response on tweeter axis, 1m, 2.83 V rms, on MYLO enclosure.

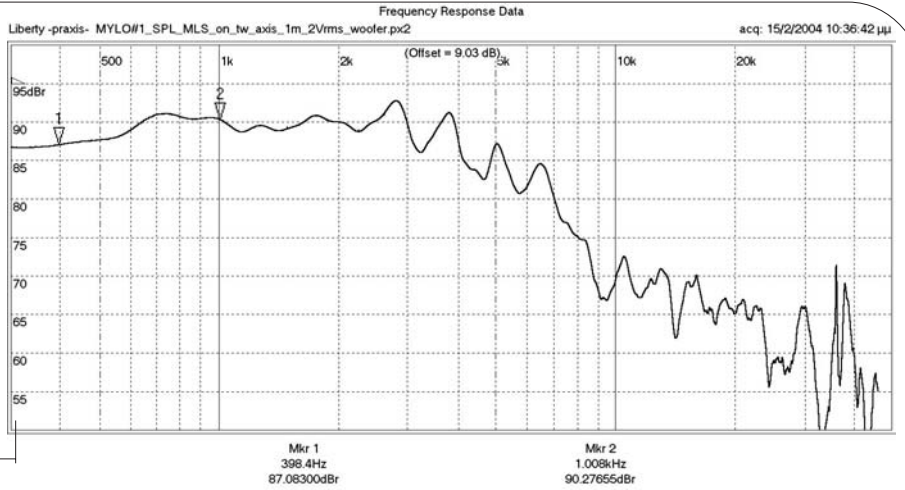


77 mm

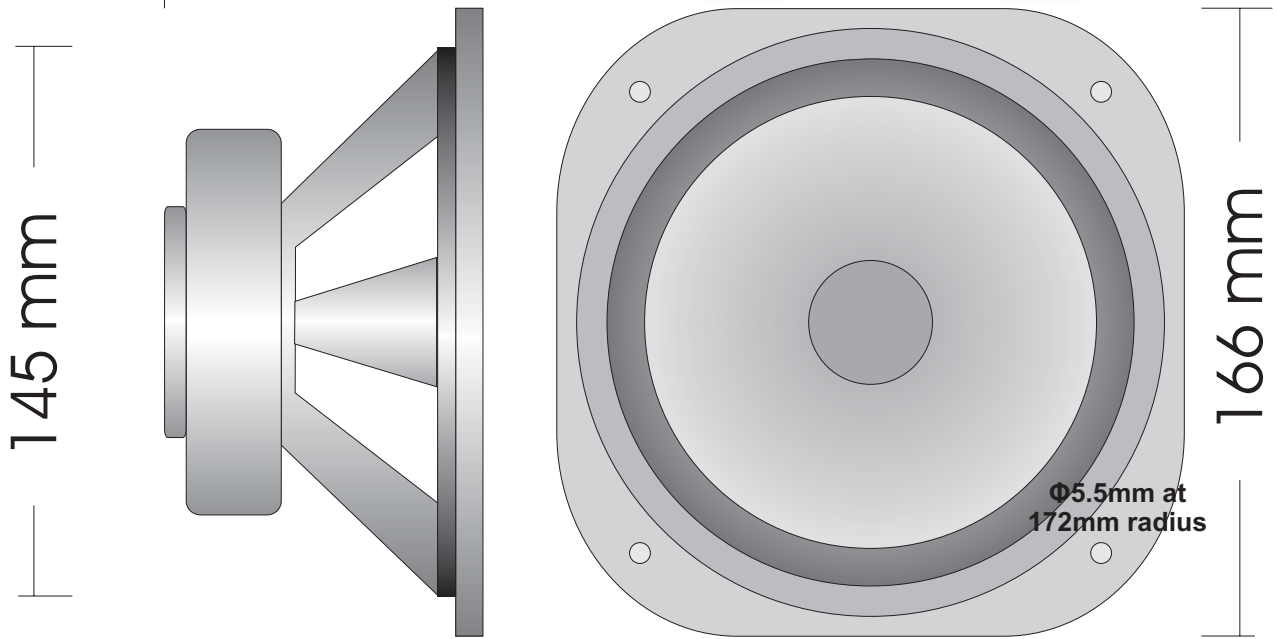

7,2 mm

166 mm

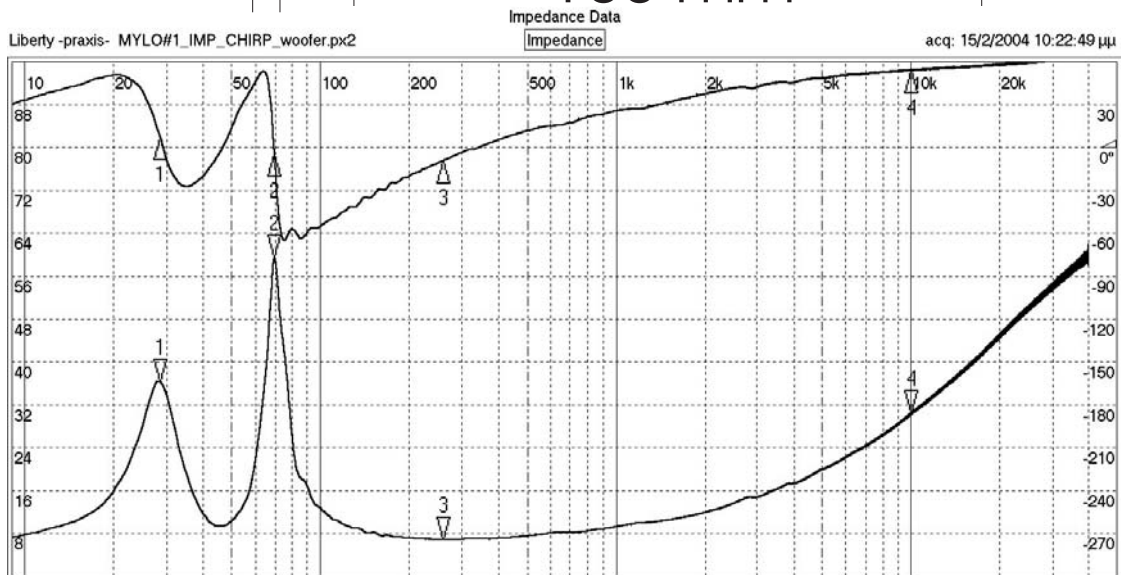

Impedance Response on MYLO enclosure.

Marker	Frequency (Hz)	Impedance (Ohm)	Phase (degrees)
Mkr 1	28.56	36.41	7.032
Mkr 2	69.58	59.45	-4.325
Mkr 3	258.5	6.900	-9.514
Mkr 4	10.07	30.49	53.88

Copyright : M.Tzortzakis, Athens, Greece / 2004. This is a proprietary information not to be edited, transmitted or reproduced without prior notice and the written permission of the owner.

Woofers, Audax, HM170Z18

Drawing : **W65-170/18 -022** Rev : **A**

Date of Issue : **12/04/04** Page : **1** of **1**